



SS22B THRU SS210B

2.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Low forward voltage drop

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Metallurgically bonded construction
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.093 grams


VOLTAGE RANGE

20 to 100 Volts

CURRENT

2.0 Ampere

DO-214AA(SMB)

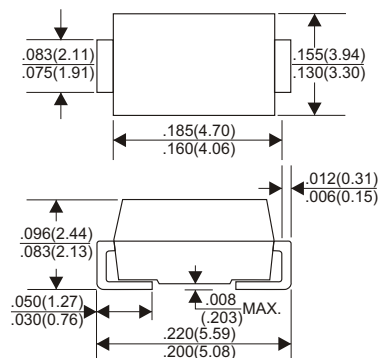

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SS22B	SS23B	SS24B	SS25B	SS26B	SS28B	SS29B	SS210B	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	90	100	V
Maximum RMS Voltage	14	21	28	35	42	56	63	70	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	90	100	V
Maximum Average Forward Rectified Current	2.0								A
See Fig. 1									
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	50								A
Maximum Instantaneous Forward Voltage at 2.0A	0.55		0.70		0.85		V		
Maximum DC Reverse Current Ta=25℃	0.2				mA				
at Rated DC Blocking Voltage Ta=100℃	20				mA				
Typical Junction Capacitance (Note1)	170				pF				
Typical Thermal Resistance R JA (Note 2)	75				℃/W				
Operating Temperature Range Tj	-55 — +150						+175	℃	
Storage Temperature Range Tstg	-55 — +150				℃				

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient.

RATING AND CHARACTERISTIC CURVES (SS22B THRU SS210B)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

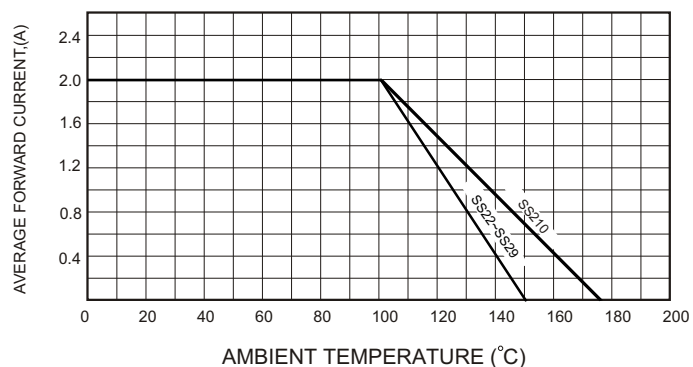


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

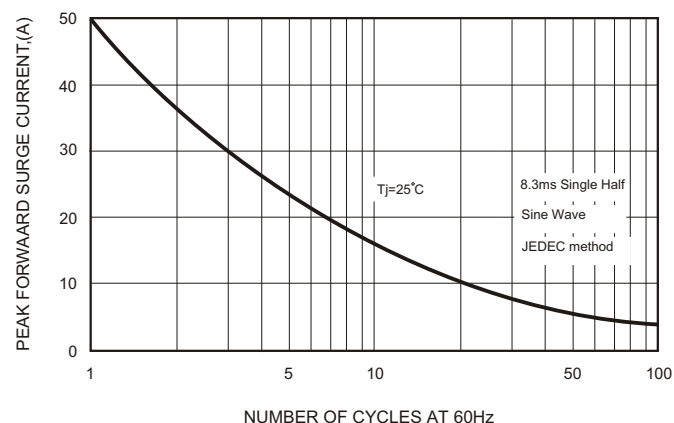


FIG.4-TYPICAL JUNCTION CAPACITANCE

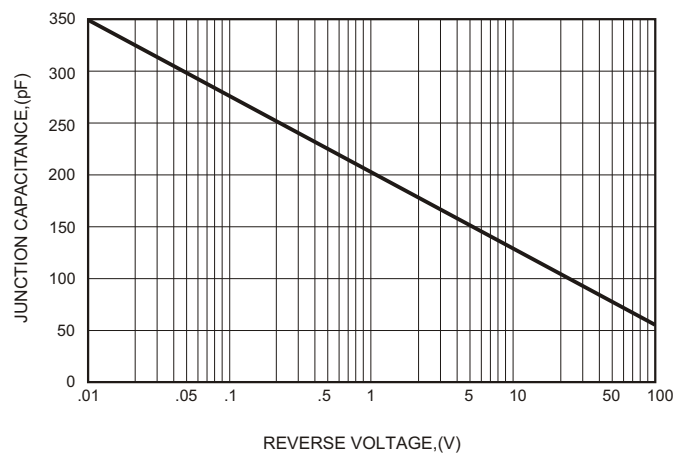


FIG.2-TYPICAL FORWARD CHARACTERISTICS


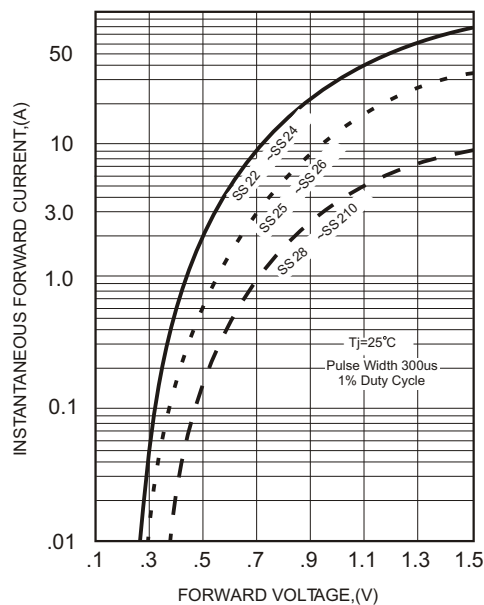


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

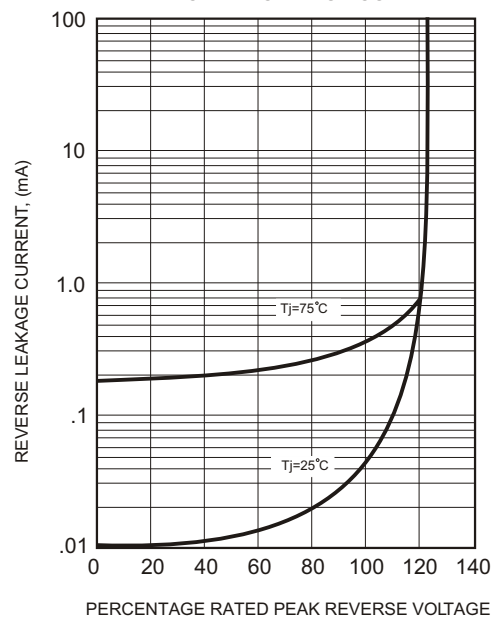

Attention:

The graph is for reference only, can't be the basis for judgment.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement.